# 3.5" LED Trims LS-RK-350

#### STANDARD













## **FEATURES**


- Available in 3000k and 4000k color temperatures.\*
- Long-life LEDs provide at least 70% of initial lumen output (L<sub>70</sub>) for 50,000 hours of operation.\*\*
- Provides at least 560 nominal lumens.
- 9 nominal watts.
- Color rendering index  $(R_a) > 90$ .
- 120 AC voltage is standard.
- Dimmable down to 10% with most line voltage dimmers.
- Die-cast housing painted white.
- Easy installation in new construction or remodel applications. Equipped with torsion springs.
- E26 medium screw-base (Edison) connector comes standard.
- Compatible with 3.25-3.5" ceiling cut-outs.
- Compatible with BL350 series.
- This device is not intended for use with emergency exits.

## **WARRANTY & LISTINGS**

- cULus listed for damp and wet locations.
- Energy Star qualified.
- Title 24 compliant.
- Complies with RoHS (Restriction on Hazardous Substances) requirements.
- 5-year warranty of all electronics and housing.



## **DIMENSIONS**

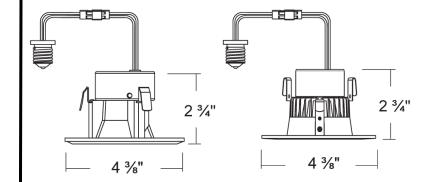

## **ORDERING INFORMATION**

MODEL	DESCRIPTION
LS-RK-350-BW-3K	3.5" LED ROUND BAFFLE TRIM, 3000K
LS-RK-350-BW-4K	3.5" LED ROUND BAFFLE TRIM, 4000K
LS-RK-350-BWSQ-3K	3.5" LED SQUARE BAFFLE TRIM, 3000K

Contact factory for other color temperatures and lumen packages. L<sub>70</sub> hours are IES TM-21-11 calculated hours.