

4" & 6" Flat Square Panel LS-FSP-WH

STANDARD FEATURES



Energy efficient LED Flat Square Panel provide quick and easy installation with no can required. Durable powder-coated diecast trim with enclosed J-box is attached with a water-tight connection. Pre-installed plastic clips for easy installation. The Round LED Flat Retrofit Kit can be used in new construction applications as a can-less downlight.

FEATURES

- Available in 4000k (neutral white) and 5000k (cool white) color temperatures.*
- Long-life LEDs provide 50,000 hours of operation with at least 70% of initial lumen output (L₇₀).*
- Standards for damp locations and insulated ceilings (IC-rated). Small, lightweight J-box standard.
- Dimmable down to 5% with most market dimmers (120V only).
- Power factor > 0.90.
- Total harmonic distortion < 20%.
- Color rendering index > 90.
- Painted steel housing.

* Contact factory for other color temperatures and lumen packages.

** L₇₀ hours are IES TM-21-11 calculated hours.


WARRANTY & LISTINGS

- locations. Suitable for ambient temperatures from -20°C to 50°C (-4°F to 122°F).
- Complies with RoHS (Restriction on Hazardous Substances) requirements.
- Complies with FCC Part 15, class A.
- 5-year warranty of all electronics and housing.

Water-Tight Connector



DIMENSIONS

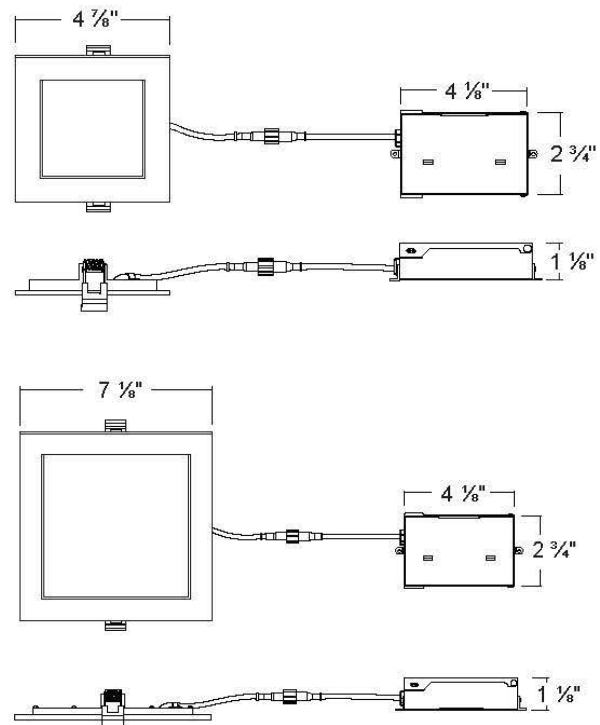

ORDERING INFORMATION

Example: LS-FSP-WH4-4k

| Model | Color Temperature | Luminaire Lumens | Luminaire Watts | Lumens Per Watt | ENERGY STAR® | Options (Order Separately) |
|------------|-------------------|------------------|-----------------|-----------------|--------------|----------------------------|
| LS-FSP-WH4 | 4K = 4000k | 530 | 11 | 50 | YES | |
| | 5K = 5000k | 530 | 11 | 50 | YES | |
| LS-FSP-WH6 | 4K = 4000k | 1030 | 16 | 53 | YES | |
| | 5K = 5000k | 1030 | 16 | 53 | YES | |