

## 40W 4' Wrap Luminaires LS-WA4FT



### STANDARD



The LS-WA4FT is a 1' x 4' LED wrap luminaire, which is designed as a direct replacement for fluorescent wraps. The LS-WA4FT is designed to deliver general ambient lighting in a variety of indoor settings, including schools, offices, hospitals and stores, and is the perfect choice for both new construction and retrofits. This high-efficacy luminaire provides long-life and uniform illumination, as well as standard 0-10vdc dimming capability.

### FEATURES

- Available in 3500k (warm/neutral white), 4000k (neutral white) and 5000k (cool white) color temperatures.\*
- Long-life LEDs provide 122,000 hours of operation with at least 70% of initial lumen output ( $L_{70}$ ).\*\*
- Choose from 4,771 luminaire lumens (119 LPW) at 3500k; 5,200 luminaire lumens (130 LPW) at 4000k; and 5,240 luminaire lumens (131 LPW) at 5000k.\*
- Uniform illumination with no visible LED pixelation.
- Universal 120-277 AC voltage (50-60Hz) is standard.
- 0-10vdc dimming capability is standard.
- Power factor > 0.90.
- Total harmonic distortion < 20%.
- Color rendering index > 80.
- Steel housing and acrylic lens.
- Easy installation in new construction or retrofit.


\* Contact factory for other color temperatures and lumen packages.

\*\*  $L_{70}$  hours are IES TM-21-11 calculated hours.

### WARRANTY & LISTINGS

- cULus approved for damp locations (-20° C to 50° C / -4° F to 122° F).
- DLC premium approved.
- Complies with FCC Part 15, Class A.
- Complies with IEEE C.62.41-1991, Class A input transient surge protection (2.5kV).
- Complies with IEC 61000-4-2 level 2 (4kV) electrostatic discharge (ESD).
- Complies with RoHS (Restriction on Hazardous Substances) requirements.
- 5-year warranty of all electronics and housing.

### DIMENSIONS

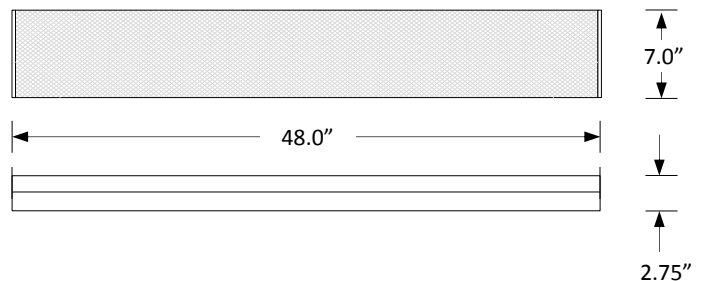

### ORDERING INFORMATION

Model	Color Temperature	Luminaire Lumens	Luminaire Watts	Lumens / Watt
LS-WA4FT-40-35KMV-ET	3500k	4,771	40	119
LS-WA4FT-40-4KMV-ET	4000k	5,200	40	130
LS-WA4FT-40-5KMV-ET	5000k	5,240	40	131

## ELECTRICAL

Model	Color Temp.	CRI <sup>1</sup>	Luminaire Lumens	Luminaire Watts	Lumens Per Watt	Input Voltage <sup>2</sup>	Input Current (A)			Power Factor	THD <sup>3</sup>	L <sub>70</sub> Hours <sup>4</sup>
							120V	240V	277V			
LS-WA4FT-40-35KMV-ET	3500k	> 80	4,771	40	119	120-277	0.33	0.17	0.14	> 90%	< 20%	122,000
LS-WA4FT-40-4KMV-ET	4000k	> 80	5,200	40	130	120-277	0.33	0.17	0.14	> 90%	< 20%	122,000
LS-WA4FT-40-5KMV-ET	5000k	> 80	5,240	40	131	120-277	0.33	0.17	0.14	> 90%	< 20%	122,000

<sup>1</sup> Color rendering index.


<sup>2</sup> All 50-60Hz.

<sup>3</sup> Total harmonic distortion.

<sup>4</sup> L<sub>70</sub> refers to the number of hours at which lumen output declines to 70% of the initial level. L<sub>70</sub> hours are IES TM-21-11 calculated hours.

## PHOTOMETRIC DATA

### Model: LS-WA4FT-40-5KMV-ET (5,240 lumens)

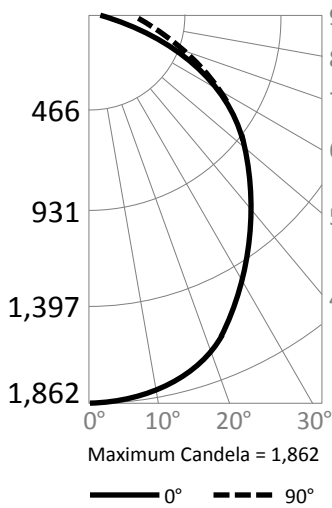

#### Candlepower Summary

	0°	90°
0°	1,862	1,862
10°	1,819	1,820
20°	1,688	1,686
30°	1,483	1,477
40°	1,223	1,226
50°	943	966
60°	660	721
70°	404	504
80°	178	317
90°	3	160

#### Zonal Lumen Summary

Zone	Lumens	% Fixture
0° - 10°	188	3.6%
0° - 20°	720	13.7%
0° - 30°	1,504	28.7%
0° - 40°	2,410	46.0%
0° - 50°	3,308	63.1%
0° - 60°	4,089	78.0%
0° - 70°	4,684	89.4%
0° - 80°	5,064	96.6%
0° - 90°	5,240	100.0%
90° - 180°	0	0%
0° - 180°	5,240	100.0%

#### Cone of Light

