
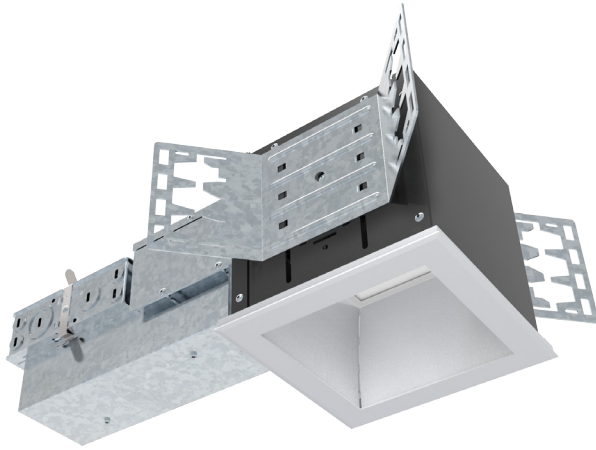


LS-L4-FS

4" ARCHITECTURAL SQUARE LED RECESSED DOWNLIGHT

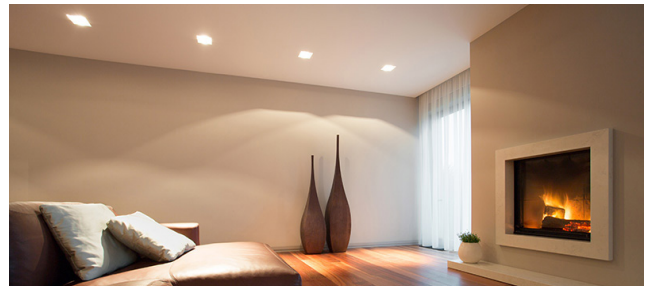

DESCRIPTION

Architectural LED luminaire, iron shell spray production, with anti-corrosion shell. Emergency system is available.
 Isolated power supply, safe and without flicker.
 LED light source using high quality, high lumen and high CRI LED bead.
 Square emitting surface, with uniform light distribution, high luminous efficiency. Energy saving, long lifespan even without maintain.

LAMPSHADE

Aluminum fog reflective reflector, high light uniformity.
 With marbles design mode, the overall height of the size is controlled, smooth appearance, excellent visual effects.

LIGHT SOURCE \ RADIATOR

High light transmittance, strong light diffusion performance, no shadow no glare. Point light source emitting turned into spherical light emitting.
 Milky white light transmission rate reach 90% above,
 Excellent concealed light source, achieve the best light transmission rate without seeing the LED lamp bead.
 Outstanding heat dissipation aluminum material, the temperature is guaranteed to be the touch temperature below.

LOCATING PART

Locating part, easy for installation, will not cause abnormal phenomena such as deformation.
 Resolved the problem of product is not centered.


LISTING / WARRANTY

ETL listed to US and Canadian standards for damp location W/Feed through.
 5 Years Limited Warranty.



| | |
|---------------------|-----------------------------|
| Power | 35W Max. |
| Input Voltage | 120V/277V/120V-277V |
| Lumen | 2500/3000LM |
| Power Factor | PF>0.98 |
| CRI | 80+/90+ |
| Beam Angle | 60°, 90° Optional |
| Dimmable | NONE/0 ~ 10v Dimming |
| Light Source Brands | Osram, Seoul, Cree, Luminus |
| Lifespan | 50000Hours |

DIMENSIONS

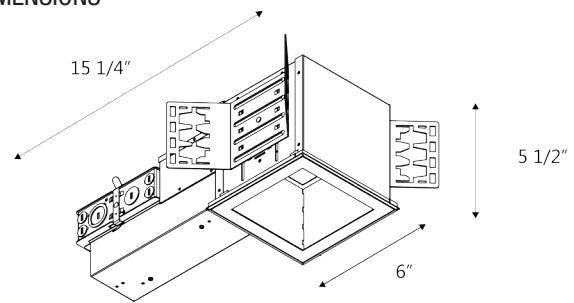

ORDERING GUIDE / YOUR PRODUCT CODE

| SERIES | INPUT VOLTAGE | BEAM ANGLE | POWER/LUMEN | CCT | DIMMABLE | LED AVAILABLE | FINISH |
|--------------------------------|---------------|----------------|--------------|---------|-------------------|---------------|----------------|
| ○ LS-L4-FS | ○ 120V | ○ 60° Optional | ○ 30W 2500LM | ○ 2700K | ○ NONE | ○ Cree | ○ White |
| 4" Architectural LED Downlight | ○ 277V | ○ 90° Optional | ○ 35W 3000LM | ○ 3000K | ○ 0 ~ 10v Dimming | ○ Citizen | ○ Black |
| | ○ 120-277V | | | ○ 4000K | ○ TRIAC Dimming | ○ Epistar | ○ Satin Nickel |
| | | | | ○ 5000K | | ○ Seoul | ○ Gray |
| | | | | ○ 6000K | | ○ Osram | |

* Customized Also Available