


LS-L4-R

4" REMODEL ADJUSTABLE SQUARE LED RECESSED DOWNLIGHT

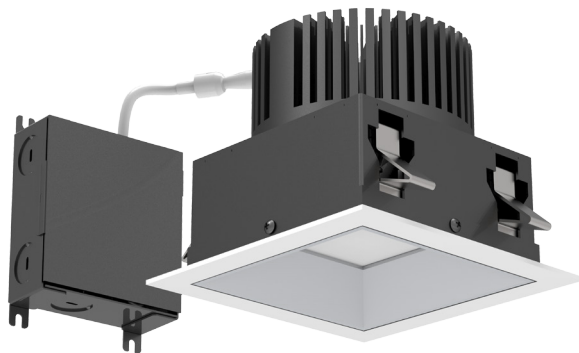

DESCRIPTION

Lamp height can be adjusted, accommodate 1/2" to 1 1/4" ceiling thickness. Trimmed and trimless available.

Rotated separated reflector, more convenient for parts replacement. Isolation driver, high power factor and conversion efficiency, constant current output.

Application: Automotive and Parking, Education, Government, Healthcare, Hospitality, Offices and Banks, Religious, Retail.

TRIM

Die-casting aluminum, high-reflective powder spraying, high light uniformity.

LIGHT SOURCE

High light transmittance, strong light diffusion performance, no shadow, no glare.

Point light source emitting turned into spherical light emitting.

Milky white light transmission rate reach 90% above.

Excellent concealed light source, achieve the best light transmission rate without seeing the LED lamp bead.

RADIATOR


Excellent cold forging radiator, good heat dissipation.

LISTING / WARRANTY

ETL listed to US and Canadian standards for damp location W/Feed through.
5 Years Limited Warranty.




DIMENSIONS

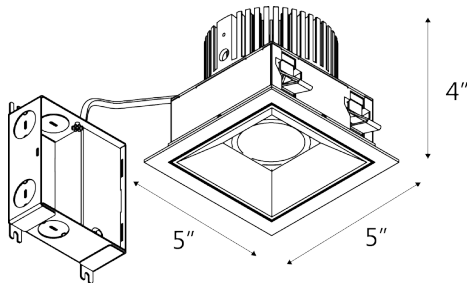

TRIM OPTION



Trimmed



Trimless

ORDERING GUIDE / YOUR PRODUCT CODE

SERIES	TRIM	INPUT VOLTAGE	POWER/LUMEN	CCT	DIMMABLE	FINISH
<input type="radio"/> LS-L4-R 4" Adjustable LED Downlight	<input type="radio"/> Trimmed <input type="radio"/> Trimless	<input type="radio"/> 120V <input type="radio"/> 277V <input type="radio"/> 120-277V	<input type="radio"/> 15W / 1000LM <input type="radio"/> 20W / 1500LM <input type="radio"/> 30W / 2250LM	<input type="radio"/> 2700K <input type="radio"/> 3000K <input type="radio"/> 3500K	<input type="radio"/> NONE <input type="radio"/> TRIAC <input type="radio"/> RD 0-10V	<input type="radio"/> White <input type="radio"/> Black <input type="radio"/> Satin Nickel <input type="radio"/> Clear

* Customized Also Available