


- o Available in LED & Incandescent
- o White Powder Coated Aluminum
- o Wall or Ceiling Mount
- o UL Listed for Wet Locations
- o Standard Pack QTY: 6


SENTINEL - SHORT & MEDIUM



LS112

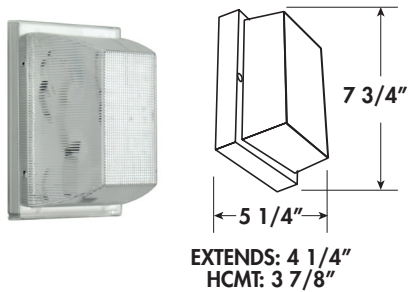

LS113

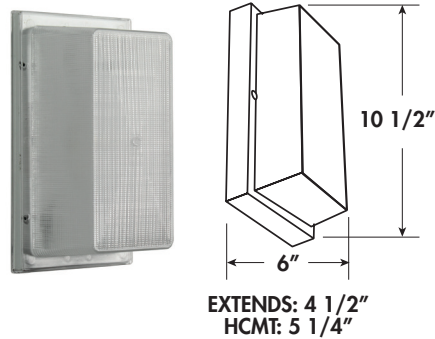

RoHS compliant



STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
LS112 LS113	<p>EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE, ENERGY STAR</p> <p>LE800 - 13W, 80 CRI W-1140lm 3000K >88 Lumens Per Watt** C-1280lm 4000K</p>	W-White	<p>ACRYLIC C-Clear F-Glare Reduced Frost Prismatic POLYCARBONATE P-Clear</p>	N/A
	<p>INCANDESCENT, MEDIUM BASE, 120V I40-1 X 40W Max</p>			

*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST **ESTIMATED FROM LED SOURCE



Fixtures available with custom packaging options, assembled or knocked down. MOQs apply

For more information contact our sales department at 630-889-8100 or visit solutions4lighting.com