


- o Available in LED & Incandescent
- o Electronic Dimmable LED (120V only)
- o Wall or Ceiling Mount
- o Low Flicker 90CRI Models
- o Multi-Volt LED Available
- o UL Listed for Damp Locations

11" DRUM

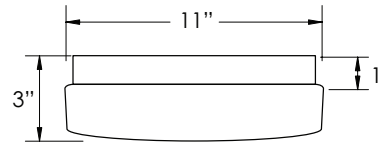

11" DRUM

LS311



RoHS compliant



STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS	
LS311	EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE, ENERGY STAR***	ALUMINUM	ACRYLIC	M-Motion Sensor	
	LE800 - 13W, 80 CRI >88 Lumens Per Watt**	W-White	W-White		
	LE1200 - 14W, 80 CRI >102 Lumens Per Watt**	W-1140lm 3000K C-1280lm 4000K			
	LE1800 - 22W, 80 CRI >88 Lumens Per Watt**	W-1430lm 3000K C-1500lm 4000K			
	LOW FLICKER - 90 CRI				
	LT800 - 12W, 90 CRI >85 Lumens Per Watt**	W-1950lm 3000K C-2130lm 4000K			
	LT1200 - 16W, 90 CRI >86 Lumens Per Watt**	W-1020lm 3000K C-1040lm 4000K			
	LT1200 - 16W, 90 CRI >86 Lumens Per Watt**	W-1370lm 3000K C-1400lm 4000K			
	LT1800 - 24W, 90 CRI >82 Lumens Per Watt**	W-1980lm 3000K C-2020lm 4000K			
	MULTI-VOLT LED 120-277V, 50/60 Hz, CONSTANT CURRENT AT 700mA, DRIVER UL CLASS 2, HPF, THERMALLY PROTECTED ARRAY, 50,000 HRS L70* AMBIENT OP TEMP -40°C TO +40°C, 3 YEAR WARRANTY	ALUMINUM	ACRYLIC	M-Motion Sensor	
L1300 - 17W, 80 CRI >75 Lumens Per Watt**	W-White	W-White			
	INCANDESCENT, MEDIUM BASE, 120V	ALUMINUM	ACRYLIC	LED LAMP, 3 YEAR WARRANTY DIMMABLE, ENERGY STAR	
I40-1 X 40W Max	W-White	W-White			



*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST **ESTIMATED FROM LED SOURCE
 ***EXCLUDES LE1800, LT800, LT1200, LT1800 MODELS AND MODELS WITH MOTION SENSOR OPTION
 Scan the QR code to the left to access the Energy Star qualified product list.

Fixtures available with custom packaging options, assembled or knocked down. MOQs apply

For more information contact our sales department at 630-889-8100 or visit solutions4lighting.com