


- o Available in LED & Incandescent
- o Electronic Dimmable LED (120V only)
- o Wall or Ceiling Mount
- o Low Flicker 90CRI Models
- o Multi-Volt LED Available
- o UL Listed for Damp Locations

14" MUSHROOM



LS324

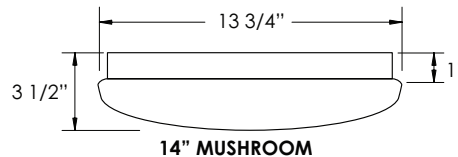

RoHS compliant



STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
LS324	EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE, ENERGY STAR	ALUMINUM	ACRYLIC	M-Motion Sensor
	W-White	W-White		
	LE1200 - 14W, 80 CRI >102 Lumens Per Watt**	W-1430lm 3000K C-1500lm 4000K		
	LE1800 - 22W, 80 CRI >88 Lumens Per Watt**	W-1950lm 3000K C-2130lm 4000K		
	LE2600 - 32W, 80 CRI >84 Lumens Per Watt**	W-2700lm 3000K C-2750lm 4000K		
	LOW FLICKER - 90 CRI			
	LT1200 - 16W, 90 CRI >86 Lumens Per Watt**	W-1370lm 3000K C-1400lm 4000K		
LT1800 - 24W, 90 CRI >82 Lumens Per Watt**	W-1980lm 3000K C-2020lm 4000K			
LT2600 - 31W, 90 CRI >90 Lumens Per Watt**	W-2750lm 3000K C-2850lm 4000K			
LS324	MULTI-VOLT LED 120-277V, 50/60 Hz, CONSTANT CURRENT AT 700mA, DRIVER UL CLASS 2, HPF, THERMALLY PROTECTED ARRAY, 50,000 HRS L70* AMBIENT OP TEMP -40°C TO +40°C, 3 YEAR WARRANTY, ENERGY STAR	ALUMINUM	ACRYLIC	M-Motion Sensor
	W-White	W-White		
L1700 - 22W, 80 CRI >82 Lumens Per Watt**	W-1704lm 3000K C-1824lm 4000K			
LS324	INCANDESCENT, MEDIUM BASE, 120V	ALUMINUM	ACRYLIC	LED LAMP, 3 YEAR WARRANTY DIMMABLE, ENERGY STAR
	I240-2 X 40W Max	W-White	W-White	
	LWE-A19/E26, 80CRI, 3000K LCE-A19/E26, 80CRI, 4000K			



*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST **ESTIMATED FROM LED SOURCE
 ***EXCLUDES LT1200, LT1800, LT2600 MODELS AND MODELS WITH MOTION SENSOR OPTION
 Scan the QR code to the left to access the Energy Star qualified product list.

Fixtures available with custom packaging options, assembled or knocked down. MOQs apply

For more information contact our sales department at 630-889-8100 or visit solutions4lighting.com